Fire Alarm Bells

The bell remains the most commonly used alarm for fire evacuation systems. Recognising this, Vimpex continue to innovate with their all-aluminium range of fire alarm bells.

Five bells make up the range of 150mm (6 inch) and 200mm (8 inch) internal and external units. Being of aluminium construction, our bells have a very high volume output matched with extremely low power consumption - just 11mA for the 150mm internal.

The specially designed weatherproof bells have an aluminium back box giving either single or double threaded entry for maximum flexibility in



installation. This is supplied as a full fixing kit with gasket and screws.

As with the Vimpex sounder range, all bells can be supplied branded with your company logo.

Features

- Low current consumption only 11mA
- Quickly and easily installed
- Excellent sonorous tone up to 100dB(A) at 1 metre
- Slim profile
- Fully suppressed and polarised
- Simple installation with multi-fixing base plate
- Purpose-made weatherproof range
- 24V bells certified by LPCB to EN54-3:2001
- 24V bells compliant with Construction Products Directive



692a

0832


DATASHEET


Specification

Description	6" (150mm)	6" (150mm)	8" (200mm)	6" (150mm)	8" (200mm)
	Internal - 12V	Internal - 24V	Internal - 24V	Weatherproof	Weatherproof
Model No.	MBF-6EV-12	MBF-6EV-24	MBF-8EV	MBA-6 + BBX-4	MBA-8 + BBX-4
Rated Voltage (Vdc)	9.6 - 13.2	20.4 - 27.6	20.4 - 27.6	20.4 - 27.6	20.4 - 27.6
Rated Current @24V (mA)	40	11	17	12	25
Starting Voltage (Vdc)	5.5	19.2	19.2	16.0	16.9
Sound Output dB(A) @1m (max)	100.7	96.5	98.8	100.5	100.1
Temperature Range (°C)	-10 to +50				
Humidity Range (%)	45 - 85				
Weight (g), (*with backbox)	410	410	640	780*	1100*
Gong Colour	Red				
Gong Construction	Aluminium				

Note: Refer to Sound Output Data sheet (DS/BELLDATA/ISS1) for full data and polar plot

Installation

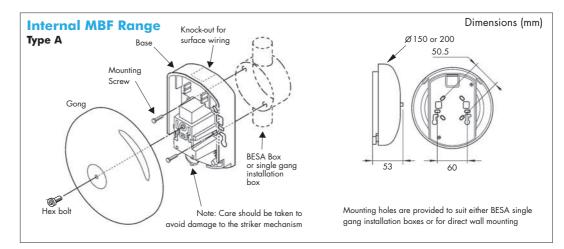

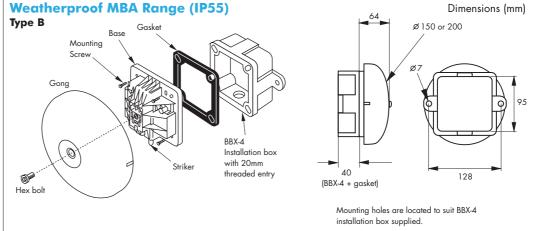

Other Products and Accessories

- Fire-Cryer[®] Voice Enhanced Sounders
- Electronic Sounders
- Beacons and Strobe Lights
- Sounder Accessories & Fire System Ancillaries
- Stopper Range of Vandal Deterrent Products
- Water Leakage Detection Systems

We reserve the right to change or amend any design or specification in line with our policy of continuing development and improvement. Part No: DS/BELL/ISS 11



VIMPEX

Vimpex Ltd

Star Lane, Great Wakering Essex, SS3 OPJ England. Tel: +44 (0) 1702 216999 Fax: +44 (0) 1702 216699 E-mail: sales@vimpex.co.uk

www.vimpex.co.uk



Quality System Certificate No. 456 Assessed to ISO 9001:2000

Fire Industry Association