

Wireless Sounder & Visual Indicator







The Wi-Fyre Wireless Sounder & Visual Indicator has been designed to give an alarm tone together with a visual (flashing LED) indication when activated. It can be wall or ceiling mounting and is available in either red or white finishes. 22 user selectable tones to choose from, in addition to a volume control.

Approvals

All Wi-Fyre Devices are fully certified to EN54-25 - the European product standard for wireless fire alarms, which necessitates third party assessment to confirm that it meets very specific requirements.

Wi-Fyre also complies with ENTSI 300:200 - the standard requirements for the Radio Equipment Directive (RED), and BS 5839-1 - the code of practise for design, installation, commissioning and maintenance of fire alarm systems in non-domestic premises.





Tech Specs

Radio

- 10101					
lacksquare	Operating Frequency	868 - 870 MHz, 14dBm			
2	Range	150m open area			
Sound					
4	Sounder Type	А			
●	Sound Output @ 1m	102dB (this applies to 'TONE 0' 800Hz and 970Hz, 500ms each)			
11	Tone Patterns	22			
Visual Indication					
- <u>Ģ</u> -	Visual Indication Type	Light-emitting diode			

White

Electrical

Power Source

Visual Indication Colour





4 x Lithium AA Cell (Saft LS14500)

2 x Lithium C Cell (Saft LS26500)

	Battery Life	Up to 3 years
--	--------------	---------------

Environmental

8	Operating Temperature	-10 to +55°C
•	Humidity	10 to 93% RH (non-condensing)
†	Ingress Protection	IP21
Å	Design Environment	Indoor use only



Tech Specs


Mechanical



Red

White

Size & Weight

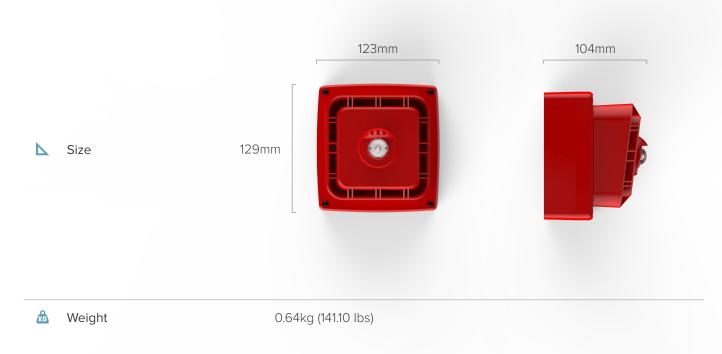

Ordering Information

Part Code	Description
10-032	Wireless Sounder & Visual Indicator with Batteries, Red
10-033	Wireless Sounder & Visual Indicator with Batteries, White
10-081	Wireless Sounder & I/O Lithium Metal Battery Pack